LINGLONG

LINGLONG TIRE

CATALOG WEB

LINGLONG AMERICAS. INC.
Address:Linglong Americas 1484 Medina Road Suite 118
Medina, OH 44256

@LinglongTire1975 @linglongtireglobal @linglongtire

E-mail: linglong_sales@linglong.cn | Web:linglongtire.com



linglongtire.com

LINGLONG TIRE



TRUCK & BUS TIRE
CATALOG



CATALOGUE

COMPANY INTRODUCTION 04

COMPANY INTRODUCTION 04
GLOBAL LAYOUT 07

LONG HAUL 09

LLD71 DRIVE 11
LLT71 TRAILER 12
LLS71PRO STEER 13
LLD72PRO DRIVE 14

REGIONAL 19

LRD71 DRIVE 21
LRT71 TRAILER 22
LRA71 ALL POSITION 23
LRA72s ALL POSITION 24

ON&OFF ROAD 35

LMA71 ALL POSITION 37
LMA72w ALL POSITION 38

COACH&URBAN 45

WINTER 49

SPECIAL TRAILER 55

LST71 TRAILER 57
LST72 TRAILER 58

Replacement Market Tires Warranty Manual 59







COMPANY INTRODUCTION

Founded in 1975, Shandong Linglong Tyre Co., Ltd. has grown into one of the world's leading tire manufacturers, delivering innovative and high-performance tire solutions to customers across more than 170 countries. As a vertically integrated manufacturer, Linglong combines advanced research and development, intelligent manufacturing, global supply chain capabilities, and comprehensive customer support to meet the evolving needs of the automotive and commercial transportation industries.

linglongtire.com

Our retail network consists of

200,000

outlets globally, promoting our brand reputation and customer loyalty through our reliable product quality and excellent customer service.

Sold in over 170 countries worldwide, Linglong Tire is a trusted global manufacturer supplying original equipment (OE) tires to more than 200 vehicle production facilities for over 70 leading automotive brands. With more than 300 million OE tires delivered globally, Linglong's proven engineering, quality, and manufacturing expertise provide distributors, dealers, fleets and OEM partners across the globe with reliable, high-performance tire solutions backed by global scale and consistent supply.

Linglong's brand value reached

17.85

Billion dollars in 2026

Linglong has sponsored over

100

Sports events and teams worldwide

SPONSORING SOME OF THE BIGGEST NAMES IN SPORTS

Such as Real Madrid CF and Chelsea FC, to enhance its brand awareness and influence.



GLOBAL LAYOUT



R&D Center in the United States

R&D Center in Germany

Serbia

Linglong International
Europe d.o.o.Zrenjanin

Linglong International
Tyre(Thailand)Co.,Ltd

Open R&D Innovation System

3 Countries

8 R&D Centers

1500+ Authorized Patents

2000+ Technical Team

Global Strategic Layout

Linglong Tire's global manufacturing network is built on a strategic "Globalization + Regionalization + Localization" approach, enabling the company to efficiently serve customers across key markets worldwide. With multiple production facilities throughout China and international manufacturing hubs in Thailand and Serbia, Linglong delivers scalable production capacity, reliable supply chain performance, and localized market support to distributors, dealers, fleets, and OEM partners around the world.

Production Bases Outside China

- Linglong International Tyre (Thailand) Co., Ltd.
- Linglong International Europe d.o.o. Zrenianin

Production Bases in China

- Jilin Linglong Tyre Co., Ltd.
- Shandong Linglong Tyre Co., Ltd.
- Dezhou Linglong Tyre Co., Ltd.
- Hubei Linglong Tyre Co., Ltd.
- Guangxi Linglong Tyre Co., Ltd.

LONG HAUL

LLD71 11

LLT71 12

LLS71PRO 13

LLD72PRO 14

KTD10 15

LDE892 15

LLF16 15

LLF16e+ 16

LLD37 16

LLD37e+ 16

LTE821 17

LDL817 17

LTL811 18

LLD76 18



LLD71



LLT71



LLS71PRO



LLD72PRO





DRIVE

LLD71

RADIAL TRUCK TIRE

WEAR-RESISTANT

GRIP



MADE IN THAILAND

FEATURES & BENEFITS:



Closed shoulder promoted uniform wear and improved rolling resistance.



Z-Zag groove provides good traction performance.



Aggressive center lugs help to improve traction in wet or dry conditions for the life of the tread.



Meet smartway verified standard.

TEST RESULTS

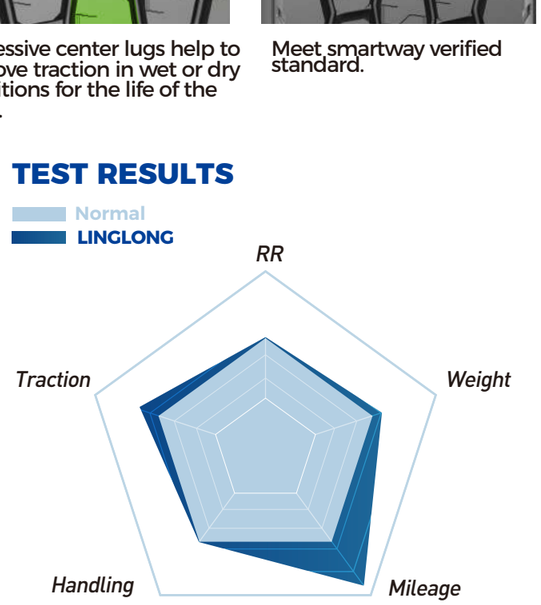

TRAILER

LLT71

RADIAL TRUCK TIRE

WEAR-RESISTANT

RESISTANCE

GRIP



MADE IN THAILAND

FEATURES & BENEFITS:



Closed shoulder promoted uniform wear and improved rolling resistance.



Micro sipes on groove edges resists abnormal or"river wear".



Decoupling groove helps resist uneven shoulder wear.



Meet smartway verified standard.

TEST RESULTS

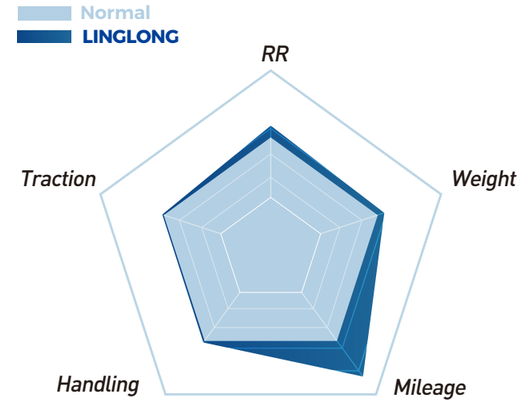

LLD71
RADIAL TRUCK TIRE

DRIVE

Size	Load Index	Speed symbols	Load Range	PR	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in inches)	Section Width (in inches)	Tread depth (in 32nds)
11R22.5	146/143	L	H	16	6005	120	6610	120	41.53	11.06	26
11R24.5	149/146	L	H	16	6610	120	7610	120	43.5	11.06	26
295/75R22.5	144/141	L	H	14	5675	110	6175	110	40.24	11.54	26
295/75R22.5	146/143	L	H	16	6005	120	6610	120	40.24	11.54	26

LLT71
RADIAL TRUCK TIRE

TRAILER

Size	Load Index	Speed symbols	Load Range	PR	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in inches)	Section Width (in inches)	Tread depth (in 32nds)
295/75R22.5	146/143	L	H	16	6005	120	6610	120	39.41	11.42	12
11R22 5	146/143	L	H	16	6005	120	6610	120	40.94	11.1	12
11R24.5	149/146	L	H	16	6610	120	7160	120	42.91	11.1	12

STEER

LLS71 PRO

RADIAL TRUCK TIRE



MADE IN THAILAND

FEATURES & BENEFITS:



Open designed decoupling groove for enhanced even wear performance.



Outer groove and shoulder sipes to extend tire life by protecting against cracking and tearing



Center rib diagonal sipes to promote even wear and grip.

TEST RESULTS

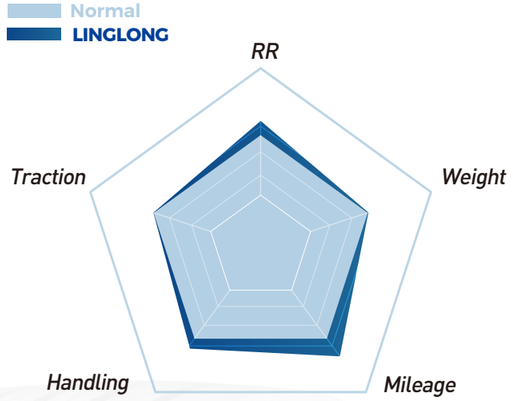

LLS71 PRO
RADIAL TRUCK TIRE

STEER

Size	Load Index	Speed symbols	Load Range	PR	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in inches)	Section Width (in inches)	Tread depth (in 32nds)
295/75R22.5	144/141	L	14	G	5675	110	6175	110	39.92	11.73	18
295/75R22.5	146/143	L	16	H	6005	120	6610	120	39.92	11.73	18
295/75R22.5	149/146	L	18	J	6610	123	7160	123	39.92	11.73	18
11R22 5	146/143	L	16	H	6005	120	6610	120	41.05	11.06	18
11R24.5	149/146	L	16	H	6610	120	7610	120	43.02	11.06	18

DRIVE

LLD72 PRO

RADIAL TRUCK TIRE



MADE IN THAILAND

FEATURES & BENEFITS:



Closed shoulder promoted uniform wear and improved rolling resistance.



Z-Zag groove provides good traction performance



3D sipe for longer mileage and traction performance.

TEST RESULTS

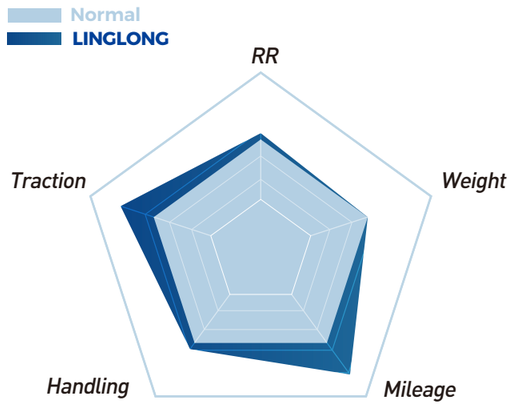

LLD72 PRO
RADIAL TRUCK TIRE

DRIVE

Size	Load Index	Speed symbols	Load Range	PR	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in inches)	Section Width (in inches)	Tread depth (in 32nds)
295/75R22.5	144/141	L	G	14	5675	110	6175	110	40.39	11.73	28
295/75R22.5	146/143	L	H	16	6005	120	6610	120	40.39	11.73	28
11R22 5	146/143	L	H	16	6005	120	6610	120	41.61	11.06	28
11R24.5	149/146	L	H	16	6610	120	7610	120	43.58	11.06	28

KTD10
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.93	10.98	30.0	TRA
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.93	10.98	30.0	TRA
11R24.5	14	146/143	L	8.25	6005	105	6610	105	43.94	10.98	30.0	TRA
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.94	10.98	30.0	TRA
295/75R22.5	14	144/141	L	9.00	5675	110	6175	110	40.39	11.73	28.0	TRA
295/75R22.5	16	146/143	L	9.00	6005	120	6610	120	40.39	11.73	28.0	TRA
285/75R24.5	14	144/141	L	8.25	5675	110	6175	110	41.81	11.14	28.0	TRA
285/75R24.5	16	147/144	L	8.25	6175	120	6780	120	41.81	11.14	28.0	TRA

- Low rolling resistance reduces fuel consumption.
- Closed shoulder to fight irregular wear.
- New pattern design improves mileage for long-distance transportation.

LDE892
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.93	10.98	27.7	TRA
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.93	10.98	27.7	TRA
11R24.5	14	146/143	L	8.25	6005	105	6610	105	43.94	10.98	27.7	TRA
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.94	10.98	27.7	TRA
295/75R22.5	14	144/141	L	9.00	5675	110	6175	110	40.39	11.73	27.7	TRA
295/75R22.5	16	146/143	L	9.00	6005	120	6610	120	40.39	11.73	27.7	TRA
285/75R24.5	14	144/141	L	8.25	5675	110	6175	110	41.81	11.14	27.7	TRA
285/75R24.5	16	147/144	L	8.25	6175	120	6780	120	41.81	11.14	27.7	TRA

- Good braking and grip on wet road.
- Long life,low rolling resistance.
- Optimize the footprint for even wear and long tread life.
- Strong carcass materials.
- Help to promote tire durability and provide tire retreadability.

LLF16
RADIAL TRUCK TIRE



STEER

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43. 46	10.98	18.3	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA

- Good handling.
- Long life.

LLF16e+
RADIAL TRUCK TIRE



STEER

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
★ 11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
★ 11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
★ 11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
★ 11R24.5	16	149/146	M	8.25	6610	120	7160	120	43. 46	10.98	18.3	TRA
★ 295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
★ 295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA
★ 285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
★ 285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA

★ SmartWay

- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

LLD37
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.93	10.98	27.7	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.93	10.98	27.7	TRA
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.94	10.98	27.7	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.94	10.98	27.7	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	40.39	11.73	27.7	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	40.39	11.73	27.7	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.81	11.14	27.7	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.81	11.14	27.7	TRA

- Good braking and grip on wet road.
- Long life.

LLD37e+
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
★ 11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.93	10.98	22.0	TRA
★ 11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.93	10.98	22.0	TRA
★ 11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.94	10.98	27.7	TRA
★ 11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.94	10.98	27.7	TRA
★ 295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	40.39	11.73	27.7	TRA
★ 295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	40.39	11.73	27.7	TRA
★ 285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.81	11.14	27.7	TRA
★ 285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.81	11.14	27.7	TRA

★ SmartWay

- Good braking and grip on wet road
- Long life.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

LTE821
RADIAL TRUCK TIRE



TRAILER

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
★ 11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	12.0	TRA
★ 11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	12.0	TRA
★ 11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	12.0	TRA
★ 11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	12.0	TRA
★ 295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	12.6	TRA
★ 295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	12. 6	TRA
★ 285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	12.0	TRA
★ 285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	12.0	TRA

★: SmartWay

- Excellent straight running performance.
- Sipes in shoulder offer low noise and good heat dissipation.
- Low fuel consumption.

LDL817
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
★ 445/50R22.5	18	158	L	14.00	---	---	9370	110	40.08	17.52	25.2	TRA
★ 445/50R22.5	20	161	L	14.00	---	---	10200	120	40.08	17.52	25.2	TRA
★ 445/50R22.5	18	155	L	14.00	---	---	8540	102	40.08	17.52	25.2	ETRTO
★ 445/50R22.5	20	161	L	14.00	---	---	10200	123	40.08	17.52	25.2	ETRTO

★: SmartWay

- Typical block pattern design makes good towing and grip on wet and dry road.
- Low fuel consumption.
- Wear-resistance compound reduces shifting to prevent uneven wear.

LTL811
RADIAL TRUCK TIRE



TRAILER

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
★ 445/50R22.5	18	158	L	14.00	---	---	9370	110	40.08	17.52	13.2	TRA
★ 445/50R22.5	20	161	L	14.00	---	---	10200	120	40.08	17.52	13.2	TRA
★ 445/50R22.5	18	155	L	14.00	---	---	8540	102	40.08	17.52	13.2	ETRTO
★ 445/50R22.5	20	161	L	14.00	---	---	10200	123	40.08	17.52	13.2	ETRTO

★: SmartWay

- Low fuel consumption.
- Wear-resistance compound reduces shifting to prevent uneven wear.

LLD76
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.65	10.98	25.2	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.65	10.98	25.2	TRA
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.66	10.98	25.2	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.66	10.98	25.2	TRA

- Good braking and grip on wet road.
- Long life.

REGIONAL

LRD71 21
LRT71 22
LRA71 23
LRA72s 24

LTL863 25
KTA20 25
KTD23 25
LLF86 26
LLA78 26
F816 26

F816e+ 27
LLF56+ 27
D955 27
LLA28 28
LLA18 28
KTD301 28
KJT016 28

LTL812 29
LFL866 29
D905 30
F820 30

D928 31
LLF02 31
LAL800 31
KTA303 32
KTD303 32

KTT306 33
KTT307 33
KTT308 33
T810 34
T810e+ 34

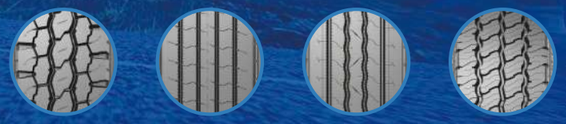

LRD71 ***LRT71*** ***LRA71*** ***LRA72s***

DRIVE

LRD71

RADIAL TRUCK TIRE

IMMOBILIZE

TRACTIVE FORCE



MADE IN THAILAND

FEATURES & BENEFITS:



Open shoulder offers good traction and help with heat dissipation.



Aggressive pattern and lateral grooves provides tire excellent drive and braking performance.



Two main grooves helps to provide good handling performance.

TEST RESULTS

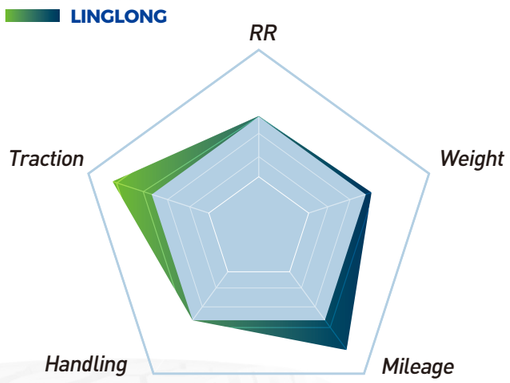

TRAILER

LRT71

RADIAL TRUCK TIRE

RESISTANCE

WEAR-RESISTANT



MADE IN THAILAND

FEATURES & BENEFITS:



Wide, continuous shoulder ribs fight turning side forces and resist tearing.



Micro sipes on groove edges resists abnormal or “river wear”.



Deep tread depth for high-scrub trailer service.

TEST RESULTS

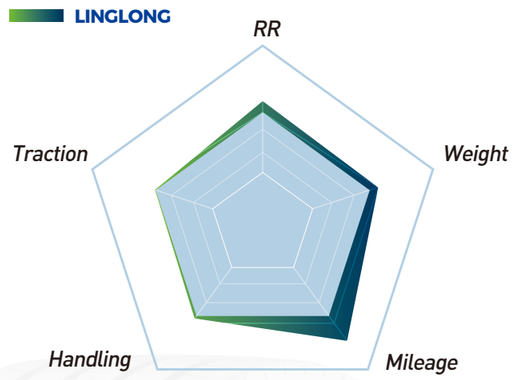

LRD71

RADIAL TRUCK TIRE

DRIVE

Size	Load Index	Speed symbols	Load Range	PR	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in inches)	Section Width (in inches)	Tread depth (in 32nds)
295/75R22.5	146/143	L	H	16	6005	120	6610	120	40.50	11.54	30
11R22 5	146/143	L	H	16	6005	120	6610	120	41.78	11.06	30
11R24.5	149/146	L	H	16	6610	120	7160	120	43.75	11.06	30

LRT71

RADIAL TRUCK TIRE

TRAILER

Size	Load Index	Speed symbols	Load Range	PR	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in inches)	Section Width (in inches)	Tread depth (in 32nds)
295/75R22.5	146/143	L	H	16	6005	120	6610	120	39.72	11.42	17
11R22 5	146/143	L	H	16	6005	120	6610	120	41.26	11.1	17
11R24.5	149/146	L	H	16	6610	120	7160	120	43.23	11.1	17

ALL POSITION

LRA71

RADIAL TRUCK TIRE

RESISTANCE

GOOD HANDLING



MADE IN THAILAND

FEATURES & BENEFITS:



A combination of 4 wavy and straight groove provide outstanding traction and drainage performance for a smoother ride and better handling.



Optimized rib distribution proportioned for added stiffness, which helps reduce irregular wear.



Tough tread compound and solid shoulder ribs to resist maneuvering scrub.

TEST RESULTS

Normal

LINGLONG

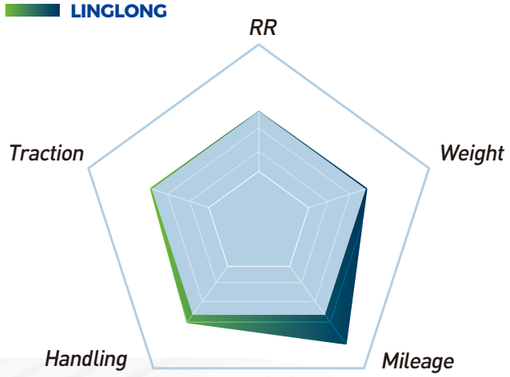

LRA71

RADIAL TRUCK TIRE

ALL POSITION

Size	Load Index	Speed symbols	Load Range	PR	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in inches)	Section Width (in inches)	Tread depth (in 32nds)
295/75R22.5	146/143	L	H	16	6005	120	6610	120	39.93	11.54	21
11R22.5	146/143	L	H	16	6005	120	6610	120	41.21	11.06	21
11R24.5	149/146	L	H	16	6610	120	7160	120	43.18	11.06	21
255/70R22.5	140/137	M	H	16	5070	120	5510	120	36.55	10.16	17
215/75R17.5*	135/133	J	H	16	4540	123	4805	123	30.24	8.35	16
225/70R19.5	128/126	L	G	14	3750	110	3970	110	31.83	8.94	16
235/75R17.5*	143/141	J	J	18	5675	127	6005	127	31.34	9.29	17
245/70R19.5	135/133	L	H	16	4540	120	4805	120	32.95	9.61	17
10R22.5	141/139	M	G	14	5355	115	5675	115	39.98	10.00	18
275/70R22.5	148/145	M	J	18	6940	130	6395	130	37.62	10.55	18

* Low profile trailer

LINGLONG TIRE

ALL POSITION

LRA72s

RADIAL TRUCK TIRE

GROUND GRIP

LONG LIFE

TRACTIVE FORCE



MADE IN THAILAND

FEATURES & BENEFITS:



A combination of 3 wavy grooves and lateral sipes on block provid outstanding traction and drain-age performance in all weather conditions.



Deep tread depth of 20/32nds provides long tread life.



LRA72s meet 3 peak mountain snow flake (3PMSF) criteria for snow traction performance.



Sidewall protector ribs preserve casing durability by fighting curbing damage with thick ribs on both sidewalls.

TEST RESULTS

Normal

LINGLONG

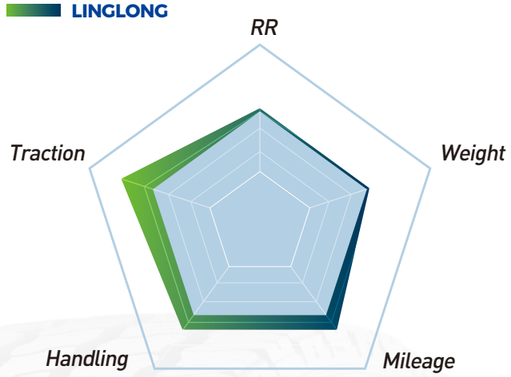

LRA72s

RADIAL TRUCK TIRE

ALL POSITION

Size	Load Index	Speed symbols	PR	Load Range	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in inches)	Section Width (in inches)	Tread depth (in 32nds)
225/70R19.5	128/126	M	14	G	3750	110	3970	110	32.08	8.94	20
245/70R19.5	135/133	M	16	H	4540	120	4805	120	33.14	9.61	20
215/75R17.5	135/133	L	16	H	4540	123	4805	123	30.41	8.35	19
265/70R19.5	137/134	L	14	G	4675	110	5070	110	34.02	10.31	20

LTL863
RADIAL TRUCK TIRE



TRAILER

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
385/65R22.5	18	158	L	11.75	---	---	9370	123	42.20	15.31	20.8	ETRTO
385/65R22.5	20	160(158)	J(L)	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO
385/65R22.5	24	164	J	11.75	---	---	11000	130	42.20	15.31	20.8	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	---	---	11000	130	42.20	15.31	20.8	ETRTO
425/65R22.5	18	162	K	12.25	---	---	10470	110	44.25	16.61	22.0	TRA
425/65R22.5	20	165	K	12.25	---	---	11400	120	44.25	16.61	22.0	ETRTO
445/65R22.5	20	169	J	13.00	---	---	12800	130	45.28	17.48	22.7	ETRTO
385/55R22.5	18	158	L	12.25	---	---	9370	123	39.21	15.20	20.8	ETRTO
385/55R22.5	20	160(158)	J(L)	12.25	---	---	9915	130	39.21	15.20	20.8	ETRTO

- Typical combined pattern design offers optimal trailer performance.
- Low rolling resistance.
- Wear-resistance compound reduces shifting to prevent uneven wear.

KTA20
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.50	10.98	19.0	TRA
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.50	10.98	19.0	TRA
11R24.5	14	146/143	L	8.25	6005	105	6610	105	43.46	10.98	19.0	TRA
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.46	10.98	19.0	TRA
295/75R22.5	14	144/141	L	9.00	5675	110	6175	110	39.92	11.73	19.0	TRA
295/75R22.5	16	146/143	L	9.00	6005	120	6610	120	39.92	11.73	19.0	TRA
285/75R24.5	14	144/141	L	8.25	5675	110	6175	110	41.34	11.14	19.0	TRA
285/75R24.5	16	147/144	L	8.25	6175	120	6780	120	41.34	11.14	19.0	TRA

- Wide and strong shoulder ribs increase tread life.
- Lasting grip and stability.
- High wear resistance.

KTD23
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
215/75R17.5	16	135/133	L	6.00	4540	123	4805	123	30.20	8.31	18.9	ETRTO
225/70R19.5	12	125/123	L	6.75	3415	95	3640	95	31.93	8.90	19.9	TRA
225/70R19.5	14	128/126	L	6.75	3750	110	3970	110	31.93	8.90	19.9	TRA
245/70R19.5	14	133/131	L	7.50	4300	110	4540	110	33.03	9.76	19.9	TRA
245/70R19.5	16	135/133	L	7.50	4540	120	4805	120	33.03	9.76	19.9	TRA

- Horizontal pattern provides tire excellent drive and braking performance.
- Shoulder pattern groove and open pattern design with good tire heat dissipation.
- Pattern block stiffener effectively restrains grinding block root tear and decorative pattern.

LLF86
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
215/75R17.5	14	126/124	L/M	6.00	3525	102	3750	102	30.20	8.31	15.7	ETRTO
215/75R17.5*	16	135/133	J/L	6.00	4540	123	4805	123	30.20	8.31	15.7	ETRTO

*Low profile trailer

LLA78
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
245/70R17.5*	18	143/141	J	7.50	5675	127	6005	127	31.06	9.76	15.1	ETRTO
235/75R17.5	14	132/130	L/M	6.75	4190	112	4400	112	31.38	9.17	16.4	ETRTO
235/75R17.5*	16	141/140	J	6.75	5510	123	5675	123	31.38	9.17	16.4	ETRTO
235/75R17.5*	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	16.4	ETRTO

*Low profile trailer

F816
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
11R22.5	16	148/145	M	8.25	6390	123	6945	123	41.50	10.98	18.3	ETRTO
12R22.5	16	152/148	L	9.00	6945	123	7830	123	42.68	11.81	20.2	ETRTO
12R22.5	16	150/147	M	9.00	6780	120	7390	120	42.72	11.81	20.2	GB
12R22.5	18	152/149	L	9.00	7160	135	7830	135	42.72	11.81	20.2	GB
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA

- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

F816e+
RADIAL TRUCK TIRE



STEER

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
★ 11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
★ 11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
★ 11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
★ 11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
★ 295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
★ 295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA
★ 285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
★ 285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA

★ SmartWay

- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

LLF56+
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
9R22.5	12	133/131	M	6.75	4300	105	4540	105	38.35	9.02	17.0	TRA
9R22.5	14	136/134	M	6.75	4675	120	4940	120	38.35	9.02	17.0	TRA
10R22.5	14	141/139	M	7.50	5355	115	5675	115	40.12	10.00	17.6	TRA
10R22.5	14	144/142	L	7.50	5840	123	6175	123	40.12	10.00	17.6	ETRTO
10R22.5	16	144/142	L	7.50	5840	130	6175	130	40.12	10.00	17.6	GB

D955
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
225/70R19.5	12	125/123	M	6.75	3415	95	3640	95	31.93	8.90	18.3	TRA
225/70R19.5	14	128/126	M	6. 75	3750	110	3970	110	31.93	8.90	18.3	TRA
245/70R19.5	14	133/131	M	7.50	4300	110	4540	110	33.03	9.76	19.5	TRA
245/70R19.5	14	133/131	M	7.50	4300	109	4540	109	33.03	9.76	19.5	ETRTO
245/70R19.5	16	135/133	M	7.50	4540	120	4805	120	33.03	9.76	19.5	TRA
245/70R19.5	16	136/134	L	7.50	4675	120	4940	120	33.03	9.76	19.5	ETRTO

- Recommended for regional and pickup/delitery drive application.
- Tread pattern provides traction in all weather conditions.

LLA28
RADIAL TRUCK TIRE



TRAILER

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
425/65R22.5	18	162	K	12.25	---	---	10470	110	44.25	16.61	22.0	TRA
425/65R22.5	20	165	J/K	12.25	---	---	11400	120	44.25	16.61	22.0	ETRTO

- Recommended for regional application.
- Zig-zag groove tread design reduces stone retention.
- Tread pattern delivers lateral traction in all weather conditions.

LLA18
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
385/65R22.5	18	158	K	11.75	---	---	9370	123	42.20	15.31	20.8	ETRTO
385/65R22.5	20	160	J	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO

- Recommended for regional applications.
- Zig-zag groove tread design reduces stone retention.

KTD301
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.93	10.98	28.3	TRA
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.93	10.98	28.3	TRA
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.93	10.98	28.3	ETTRO
11R24.5	14	146/143	L	8.25	6005	105	6610	105	43.94	10.98	28.3	TRA
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.94	10.98	28.3	TRA

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

KJT016
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
225/70R19.5	12	125/123	M	6.75	3415	95	3640	95	31.93	8.90	18.9	TRA
225/70R19.5	14	128/126	N	6.75	3750	110	3970	110	31.93	8.90	18.9	TRA

- Aggressive zigzag center grooves and open shoulder grooves provide outstanding traction in mud and snow.
- Stone rejectors protect the casing in base of the tread groove.
- Protect ribs on both sidewalls to fight damage from curbing, cuts and abrasions.
- 3D Sipes locks together under compression for the stability of a solid block.
- Strong carcass materials help promote tire durability and provide tire retreadability.

LTL812
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
9R22.5	14	136/134	M	6.75	4675	120	4940	120	38.35	9.02	18.3	TRA
10R22.5	14	141/139	M	7.50	5355	115	5675	115	40.12	10.00	18.9	TRA
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	20.2	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	20.2	TRA
11R22.5	16	148/145	M	8.25	6390	123	6945	123	41.34	10.98	20.2	ETRTO
12R22.5	16	152/148	L	9.00	6945	123	7830	123	42.68	11.81	21.4	ETRTO
12R22.5	18	152/149	L	9.00	7160	135	7830	135	42.72	11.81	21.4	GB
295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	21.4	ETRTO
295/80R22.5	18	152/149	L	9.00	7160	130	7830	130	41.10	11.73	21.4	GB
295/80R22.5	18	154/149	M	9.00	7160	123	8270	123	41.10	11.73	21.4	ETRTO
315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	17.6	ETRTO
315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	17.6	ETRTO
285/70R19.5	16	140/137	M	8.25	5070	105	5510	105	35.24	11.14	20.2	ETRTO
285/70R19.5	18	146/144	M	8.25	6175	130	6610	130	35.24	11.14	20.2	ETRTO
285/70R19.5	18	150/148	J	8.25	6945	130	7390	130	35.24	11.14	20.2	ETRTO
275/70R22.5	16	148/145	M	8.25	6390	130	6945	130	37.72	10.87	20.2	ETRTO

- Long life.
- Retreadability.
- Low eccentric wear.

LFL866
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
205/65R17.5	16	129/127 (132/132)	J(G)	6.00	3860	130	4080	130	27.99	8.03	15.7	ETRTO
215/70R17.5	14	123/121	L	6.00	3415	112	3195	112	29.41	8.31	18.3	JATMA
245/70R17.5*	18	143/141	J	7.50	5675	127	6005	127	31.06	9.76	18.3	ETRTO
215/75R17.5	14	126/124	M	6.00	3525	102	3750	102	30.20	8.31	18.3	ETRTO
215/75R17.5*	16	135/133	J	6.00	4540	123	4805	123	30.20	8.31	18.3	ETRTO
235/75R17.5	14	132/130	M	6.75	4190	112	4400	112	31.38	9.17	18.3	ETRTO
235/75R17.5*	16	141/140	J	6.75	5510	123	5675	123	31.38	9.17	18.3	ETRTO
235/75R17.5*	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	18.3	ETRTO
225/80R17.5	14	123/122	L	6.75	3305	102	3415	102	31.69	8.90	20.2	JATMA
225/90R17.5	14	127/125	L	6.75	3640	102	3860	102	33.50	8.90	16.4	JATMA
225/90R17.5	16	128/126	L	6.75	3750	102	3970	102	33.50	8.90	16.4	JATMA

* Low profile trailer

- Extra wide tread design for high mileage and even wear.
- Zig-zag grooves for excellent handling.
- Optimize structure design.

D905
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
215/75R17.5	12	124/123	M	6.00	3415	100	3525	100	30.20	8.31	18.9	ETRTO
215/75R17.5	14	126/124	L/M	6.00	3525	102	3750	102	30.20	8.31	18.9	ETRTO
215/75R17.5	16	135/133	J/L	6.00	4540	123	4805	123	30.20	8.31	18.9	ETRTO
235/75R17.5	14	132/130	L/M	6. 75	4190	112	4400	112	31.38	9.17	19.5	ETRTO
235/75R17.5	16	141/140	J	6. 75	5510	123	5675	123	31.38	9.17	19.5	ETRTO
235/75R17.5	18	143/141	J	6. 75	5675	127	6005	127	31.38	9.17	19.5	ETRTO
295/80R22.5	16	152/148	M	9. 00	6945	123	7830	123	41.10	11.73	22.0	ETRTO
295/80R22.5	18	152/149	M	9.00	7160	130	7830	130	41.10	11.73	22.0	GB
285/70R19.5	18	146/144	M	8.25	6175	130	6610	130	35.24	11.14	20.2	ETRTO
285/70R19.5	18	150/148	J	8. 25	6945	130	7390	130	35.24	11.14	20.2	ETRTO
275/70R22.5	16	148/145	M	8.25	6390	130	6945	130	37.72	10.87	22.0	ETRTO
315/70R22.5	16	154/150	M	9.00	7390	130	8270	130	39.92	12.28	22.0	ETRTO

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

F820
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
8.5R17.5	12	121/120	M	6.00	3085	91	3195	91	31.57	8.46	16.4	ETRTO
205/75R17.5	14	124/122	M	6.00	3305	109	3525	109	29.65	8.03	15.7	ETRTO
215/75R17.5*	16	135/133	J/L	6.00	4540	123	4805	123	30.20	8.31	15.7	ETRTO
235/75R17.5*	16	141/140	L	6.75	5510	123	5675	123	31.38	9.17	16.4	ETRTO
235/75R17.5*	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	16.4	ETRTO
225/70R19.5	12	125/123	M	6.75	3415	95	3640	95	31.93	8.90	15.7	TRA
225/70R19.5	14	128/126	M	6.75	3750	110	3970	110	31.93	8.90	15.7	TRA
245/70R19.5	14	133/131	M	7.50	4300	110	4540	110	33.03	9.76	16.4	TRA
245/70R19.5	14	133/131	M	7.50	4300	109	4540	109	33.03	9.76	16.4	ETRTO
245/70R19.5	16	135/133	M	7.50	4540	120	4805	120	33.03	9.76	16.4	TRA
245/70R19.5	16	136/134	M	7.50	4675	120	4940	120	33.03	9.76	16.4	ETRTO
245/70R19.5	18	141/140	J	7.50	5510	123	5675	123	33.03	9.76	16.4	ETRTO
265/70R19.5	16	139/136	M	7.50	4940	120	5355	120	34.13	10.31	17.0	GB
265/70R19.5	16	140/138	M	7.50	5205	112	5510	112	34.13	10.31	17.0	ETRTO
265/70R19.5	18	143/141	J	7.50	5675	123	6005	123	34.13	10.31	17.0	ETRTO
285/70R19.5	16	144/142	M	8.25	5840	116	6175	116	35.24	11.14	17.6	ETRTO
285/70R19.5	18	146/144	M	8.25	6175	130	6610	130	35.24	11.14	17.6	ETRTO
285/70R19.5	18	150/147	J	8.25	6780	130	7390	130	35.24	11.14	17.6	ETRTO
255/70R22.5	16	140/137	M	7.50	5070	120	5510	120	36.61	10.04	17.6	TRA
255/70R22.5	16	140/137	M	7.50	5070	116	5510	116	36.61	10.04	17.6	ETRTO
275/70R22.5	16	148/145	M	8.25	6390	130	6945	130	37.72	10.87	18.3	ETRTO
275/70R22.5	18	150/148	M	8.25	6945	130	7390	130	37.72	10.87	18.3	ETRTO

* Low profile trailer

D928
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	14	144/142	L	8.25	5840	105	6175	105	41.69	10.98	25.8	TRA
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.69	10.98	25.8	TRA
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.69	10.98	25.8	ETRTO
11R24.5	14	146/143	L	8.25	6005	105	6610	105	43.70	10.98	25.8	TRA
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.70	10.98	25.8	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	40.16	11.73	25.8	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	40.16	11.73	25.8	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.57	11.14	25.8	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.57	11.14	25.8	TRA

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

LLF02
RADIAL TRUCK TIRE



STEER & TRAILER

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
12R22.5	16	152/148	L	9.00	6945	123	7830	123	42.68	11.81	18.3	ETRTO
13R22.5	18	156/150	L	9.75	7390	127	8820	127	44.25	12.60	20.8	ETRTO
295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	18.3	ETRTO
295/80R22.5	18	152/149	M	9.00	7160	130	7830	130	41.10	11.73	18.3	GB
295/80R22.5	18	154/149	M	9.00	7160	123	8270	123	41.10	11.73	18.3	ETRTO
315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	18. 3	ETRTO
315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	18.3	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	7390	130	9370	130	42.36	12.28	18.3	ETRTO

- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

LAL800
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
12.00R24	18	156/153	K	8.5	8050	112	8820	112	48.27	12.32	18.9	ETRTO
12.00R24	20	160/156	K	8.5	8820	123	9915	123	48.27	12.32	18.9	ETRTO
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.50	10.98	20.2	TRA
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	20.2	ETRTO
12R22.5	16	152/148	L	9.00	6945	123	7830	123	42.68	11.81	20.2	ETRTO
12R22.5	18	152/149	K	9.00	7160	135	7830	135	42.72	11.81	20.2	GB
315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	20.2	ETRTO
315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	20.2	ETRTO

KTA303
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
9.5R17.5	18	143/141	M/J	6. 75	5675	127	6005	127	33.15	9.45	14.5	ETRTO
215/75R17.5	14	126/124	L	6.00	3525	102	3750	102	30.20	8.31	15.1	ETRTO
215/75R17.5*	16	135/133	J	6.00	4540	123	4805	123	30.20	8.31	15.1	ETRTO
235/75R17.5*	18	143/141	J	6. 75	5675	127	6005	127	31.38	9.17	15.7	ETRTO
9.00R20	16	144/142	K	7.0	5840	130	6175	130	40.12	10.20	18.3	GB
10.00R20	16	146/143	K	7.5	6005	120	6610	120	41.50	10.94	18.3	GB
10.00R20	18	149/146	K	7.5	6610	135	7160	135	41.50	10.94	18.3	GB
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	17.6	ETRTO
12R22.5	16	152/148	L	9.00	6945	123	7830	123	42.68	11.81	18.9	ETRTO
12R22.5	18	152/149	L	9.00	7160	135	7830	135	42.72	11.81	18.9	GB
295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	17.6	ETRTO
295/80R22.5	18	152/149	L	9.00	7160	130	7830	130	41.10	11.73	17.6	GB
315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	17.6	ETRTO
265/70R19.5	18	143/141	J	7.50	5675	123	6005	123	34.13	10.31	15.7	ETRTO
385/65R22.5	20	160	K	11.75	---	---	9915	130	42.20	15.31	20.2	ETRTO

* Low profile trailer

- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with stone rejection design.
- HAT technology: low heat generation.

KTD303
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
9. 5R17.5	18	143/141	L	6.75	5675	127	6005	127	33.15	9.45	18.3	ETRTO
215/75R17.5	16	135/133	J	6.00	4540	123	4805	123	30.20	8.31	17.6	ETRTO
235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	18.3	ETRTO
10.00R20	18	149/146	K	7.5	6610	135	7160	135	41.50	10.94	22.0	GB
295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	21.4	ETRTO
295/80R22.5	18	152/149	L	9.00	7160	130	7830	130	41.10	11.73	21.4	GB
295/80R22.5	18	154/149	L	9.00	7160	123	8270	123	41.10	11.73	21.4	ETRTO
315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	22.7	ETRTO
265/70R19.5	18	143/141	J	7.50	5675	123	6005	123	34.13	10.31	18.3	ETRTO

- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S.
- HAT technology: low heat generation.

KTT306
RADIAL TRUCK TIRE



TRAILER

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	17.6	ETRTO

- Low fuel consumption.
- HAT technology: low heat generation.
- Zigzag pattern design.
- New technology for tire to reduce the weight.

KTT307
RADIAL TRUCK TIRE



TRAILER

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	17.6	ETRTO
11R22.5	18	149/146	K	8.25	6610	135	7160	135	41.34	10.98	17.6	GB
295/80R22.5	18	154/149	L	9.00	7160	123	8270	123	41.10	11.73	17.6	ETRTO

- Low fuel consumption.
- HAT technology: low heat generation.
- Stone rejection design.
- New technology for tire to reduce the weight.

KTT308
RADIAL TRUCK TIRE



TRAILER

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	17.6	ETRTO

- Low fuel consumption.
- HAT technology: low heat generation.
- Stone rejection design.
- New technology for tire to reduce the weight.

T810
RADIAL TRUCK TIRE



TRAILER

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	13.5	TRA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	13.5	TRA
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	13.5	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43. 46	10.98	13.5	TRA
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	13.5	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	13.5	TRA
285/75R24.5	14	144/141	M	8.25	5675	110	6175	110	41.34	11.14	13.5	TRA
285/75R24.5	16	147/144	M	8.25	6175	120	6780	120	41.34	11.14	13.5	TRA
255/70R22.5	16	140/137	M	7.50	5070	120	5510	120	36.61	10.04	13.5	TRA

T810e+
RADIAL TRUCK TIRE



TRAILER

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
★ 11R22.5	14	144/142	M	8.25	5840	105	6175	105	41.50	10.98	12.6	TRA
★ 11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	12.6	TRA
★ 11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	13.5	TRA
★ 11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	13.5	TRA
★ 295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	39.92	11.73	12.6	TRA
★ 295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	39.92	11.73	12.6	TRA

★: SmartWay

- Low fuel consumption.
- Certified by U.S.A SmartWay.

ON&OFF ROAD

LMA71 37
LMA72w 38

LLA08 39
KMA400 39
LDO986 40
KXA400 40

KMD401 41
LDO986+ 41
KMA40 41
D950 42
LAR919 42
LLA38 42

KMA403 43
KMD403 43
LDO912 43



LMA71



LMA72w





ALL POSITION

LMA71

RADIAL TRUCK TIRE

WEAR-RESISTANT

TRACTIVE FORCE



MADE IN THAILAND

FEATURES & BENEFITS:



Durable tread compound and robust shoulder designed for excellent wear resistance.



3-groove pattern combined with zigzag grooves offering outstanding traction and water drainage.



Center lug with diagonal sipes to promote traction in wet or dry conditions for the life of the tread.

TEST RESULTS

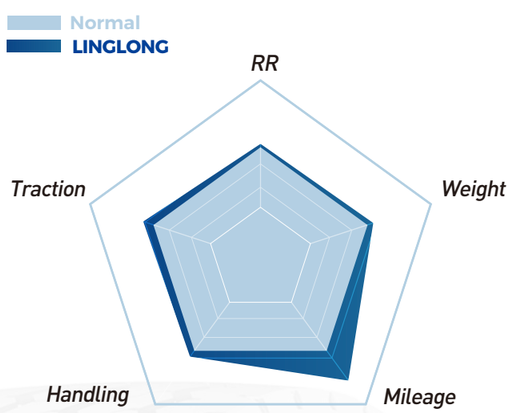

ALL POSITION

LMA72w

RADIAL TRUCK TIRE

WEAR-RESISTANT

TRACTIVE FORCE

3PMSF



MADE IN THAILAND

FEATURES & BENEFITS:



Open shoulder offers good traction while durable tread compound and robust shoulder block designed for excellent wear resistance.



Self-cleaning tread pattern provides high traction with stone rejector platforms in every groove for excellent durability.



Tread compounded and constructed to resist cuts and impacts in mixed service.

TEST RESULTS

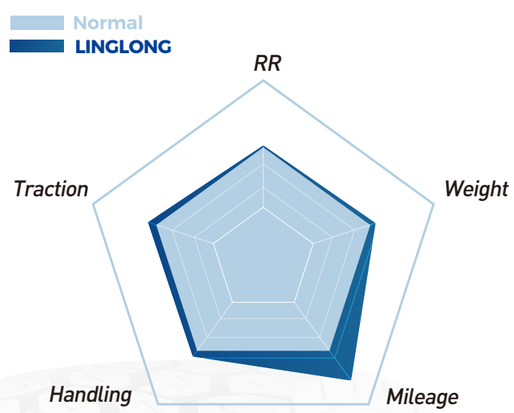

LMA71
RADIAL TRUCK TIRE

ALL POSITION

Size	Load Index	Speed symbols	Load Range	PR	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in inches)	Section Width (in inches)	Tread depth (in 32nds)
255/70R22.5	140/137	M	H	16	5070	120	5510	120	36.54	10.16	17
11R22.5	146/143	K	H	16	6005	120	6610	120	41.09	11.06	19
11R24.5	149/146	K	H	16	6610	120	7610	120	43.06	11.06	19
315/80R22.5	157/154	K	L	20	8270	130	9090	130	42.33	12.60	19
275/70R22.5	148/145	L	J	18	6940	130	6395	130	37.68	10.55	19

LMA72w
RADIAL TRUCK TIRE

ALL POSITION

Size	Load Index	Speed symbols	Load Range	PR	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in inches)	Section Width (in inches)	Tread depth (in 32nds)
385/65R22.5	160	K	L	20	---	---	9920	130	42.22	14.96	21
425/65R22.5	165	K	L	20	---	---	11400	120	44.25	16.93	22

LLA08
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
12.00R24	18	156/153	K	8.5	8050	112	8820	112	48.27	12.32	21.4	ETRTO
12.00R24	20	160/156	K	8.5	8820	123	9915	123	48.27	12.32	21.4	ETRTO
11R22.5	14	144/142	K	8.25	5840	105	6175	105	41.50	10.98	18.9	TRA
11R22.5	16	146/143	K	8.25	6005	120	6610	120	41.50	10.98	18.9	TRA
11R22.5	16	148/145	K	8.25	6390	123	6945	123	41.50	10.98	18.9	ETRTO
11R22.5	18	149/146	L/K	8.25	6610	135	7160	135	41.50	10.98	18.9	GB
12R22.5	16	152/148	K	9.00	6945	123	7830	123	42.68	11.81	21.4	ETRTO
12R22.5	18	152/149	K	9.00	7160	135	7830	135	42.72	11.81	21.4	GB
11R24.5	14	146/143	K	8.25	6005	105	6610	105	43.46	10.98	20.8	TRA
11R24.5	16	149/146	K	8.25	6610	120	7160	120	43.46	10.98	20.8	TRA
12R24.5	16	152/149	K	9.00	7160	120	7830	120	44.69	11.81	20.2	TRA
12R24.5	18	154/151	K	9.00	7610	135	8270	135	44.69	11.81	20.2	GB
255/70R22.5	16	140/137	M	7.50	5070	120	5510	120	36.61	10.04	16.0	TRA
295/80R22.5	16	152/148	K	9.00	6945	123	7830	123	41.10	11.73	20.2	ETRTO
295/80R22.5	18	154/149	K	9.00	7160	123	8270	123	41.10	11.73	20.2	ETRTO
315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	22.0	ETRTO
315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12.28	22.0	ETRTO
315/80R22.5	22	158/150	L	9.00	7390	130	9370	130	42.36	12.28	22.0	ETRTO

- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

KMA400
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
295/80R22.5	18	152/149	K	9.00	7160	130	7830	130	41.10	11.73	23.9	GB
13R22.5	18	156/150	K	9.75	7390	127	8820	127	44.25	12.60	23.9	ETRTO
13R22.5	20	158/156	K	9.75	8820	130	9370	130	44.25	12.60	23.9	ETRTO
295/80R22.5	16	152/148	K	9.00	6945	123	7830	123	41.10	11.73	23.9	ETRTO
315/80R22.5	18	154/150	K	9.00	7390	120	8270	120	42.36	12.28	23.9	ETRTO
315/80R22.5	20	156/150	K	9.00	7385	123	8820	123	42.36	12.28	23 9	ETRTO
425/65R22.5	20	165	K	12.25	---	---	11400	120	44.25	16.93	23.3	ETRTO
445/65R22.5	20	169	J/K	13.00	---	---	12800	130	45.28	17.87	23.3	ETRTO

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S and 3PMSF marking.

LDO986
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
12.00R24	20	160/156	F	8.5	8820	123	9915	123	48.27	12.32	32.1	ETRTO
12.00R24	18	156/153	F	8.5	8050	112	8820	112	48.27	12.32	32.1	ETRTO
12.00R24	20	160/157	F	8.5	9095	130	9915	130	48.27	12.40	32.1	GB
12.00R24	18	158/155	F	8.5	8540	120	9370	120	48.27	12.40	32.1	GB
11R22 5	14	144/142	F	8.25	5840	105	6175	105	41.93	10.98	30.9	TRA
11R22 5	16	146/143	F	8.25	6005	120	6610	120	41.93	10.98	30.9	TRA
11R22 5	16	148/145	F	8.25	6390	123	6945	123	41.93	10.98	30.9	ETRTO
12R22 5	16	152/148	F	9.00	6945	123	7830	123	42.68	11.81	30.9	ETRTO
12R22.5	18	152/149	F	9.00	7160	135	7830	135	43.15	11.81	30.9	GB
13R22.5	18	156/150	F	9.75	7390	127	8820	127	44.25	12.60	30.9	ETRTO
11R24.5	14	146/143	F	8.25	6005	105	6610	105	43.94	10.98	30.9	TRA
11R24.5	16	149/146	F	8.25	6610	120	7160	120	43.94	10.98	30.9	TRA
295/80R22.5	16	152/148	F	9.00	6945	123	7830	123	41.10	11.73	30.9	ETRTO
295/80R22.5	18	152/149	F	9.00	7160	130	7830	130	41.34	11.73	30.9	GB
315/80R22.5	18	154/150	F	9.00	7390	120	8270	120	42.36	12.28	30.9	ETRTO
315/80R22.5	20	156/150	F	9.00	7390	123	8820	123	42.36	12.28	30.9	ETRTO

- Off-road pattern block ensures powerful traction and good self-cleaning ability.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

KXA400
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
385/65R22.5	18	158	L	11.75	---	---	9370	123	42.20	15.31	22.7	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	---	---	9915	130	42.20	15.31	22.7	ETRTO
385/65R22.5	24	164	J	11.75	---	---	11000	130	42.20	15.31	22.7	ETRTO
425/65R22.5	20	165	K	12.25	---	---	11400	120	44.25	16.61	23 .3	ETRTO

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S marking.

KMD401
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
9.5R17.5	18	143/141	J	6.75	5675	127	6005	127	33.35	9.45	20.8	ETRTO
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.50	10.98	25.8	TRA
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.34	10.98	25.8	ETRTO
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.46	10.98	28.3	TRA
215/75R17.5	18	135/133	J	6.00	4540	123	4805	123	30.47	8.31	18.9	ETRTO
235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.54	9.17	20.2	ETRTO
295/80R22.5	16	152/148	L	9.00	6945	123	7830	123	41.10	11.73	25.8	ETRTO
295/80R22.5	18	152/149	L	9.00	7160	130	7830	130	41.10	11.73	25.8	GB

- Chip, cut and abrasion resistance tread compound.
- Stone rejection design protects groove bottom from stone puncture.
- Deep tread depth increases mileage and service life.

LDO986+
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
12.00R20	22	158/155	B	8.5	8540	140	9370	140	44.72	12.40	40.3	CAS
12.00R24	18	158/155	F	8.5	8540	120	9370	120	48.74	12.40	40.3	GB/TRA
12.00R24	20	160/157	F	8.5	9095	130	9915	130	48.74	12.40	40.3	GB
12.00R24	22	162/158	B	8.5	9370	130	10470	130	48.74	12.40	40.3	---

- Off-road pattern block ensures powerful traction and good self-cleaning ability.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth and wide tread width increase mileage and service life.

KMA40
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.50	10.98	23.1	TRA
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.46	10.98	23.1	TRA

- Chip, cut and abrasion resistance tread compound.
- Stone rejection design protects groove bottom from stone puncture.
- Deep tread depth and wide tread width increase mileage and service life.

D950
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	14	144/142	K	8.25	5840	105	6175	105	41.93	10.98	29.0	TRA
11R22.5	16	146/143	K	8.25	6005	120	6610	120	41.93	10.98	29.0	TRA
11R24.5	14	146/143	F/G	8.25	6005	105	6610	105	43.94	10.98	31.4	TRA
11R24.5	16	149/146	F/G	8.25	6610	120	7160	120	43.94	10.98	31.4	TRA
295/75R22.5	16	146/143	J	9.00	6005	120	6610	120	40.39	11.73	29.0	TRA
295/75R24.5	16	147/144	J	8.25	6175	120	6780	120	41.81	11.14	29.0	TRA

- Drive axle for on/off road conditions.
- Deep and rigid block design for good traction.
- Cut resistance compound.
- Used for logging conditions where high traction required.

LAR919
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	16	146/143	J	8.25	6005	120	6610	120	41.50	10.98	23.9	TRA
11R22.5	16	148/145	K	8.25	6390	123	6945	123	41.34	10.98	23.9	ETRTO
325/95R24	22	162/160	K	9.0	9915	123	10470	123	48.35	12.80	22.7	ETRTO

- Pattern block design reduces shoulder heat.
- Wide running surface and higher saturation design improve the wear mileage.
- Powerful traction, grip and climbing performance.

LLA38
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
385/55R22.5	18	158	L	12.25	---	---	9370	123	39.21	15.20	20.8	ETRTO
385/55R22.5	20	160	J	12.25	---	---	9915	130	39.21	15.20	20.8	ETRTO
385/65R22.5	18	158	K	11.75	---	---	9370	123	42.20	15.31	20.8	ETRTO
385/65R22.5	20	160	J/K	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO
385/65R22.5	24	164	J	11.75	---	---	11000	130	42.20	15.31	20.8	ETRTO
425/65R22.5	18	162	K	12.25	---	---	10470	110	44.25	16.61	22.0	TRA
425/65R22.5	20	165	J/K	12.25	---	---	11400	120	44.25	16.61	22.0	ETRTO
445/65R22.5	20	168	J/K	13.00	---	---	12300	120	45.28	17.48	22.7	TRA
445/65R22.5	20	169	J	13.00	---	---	12800	130	45.28	17.48	22.7	ETRTO

- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

KMA403

RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
12.00R24	18	156/153	K	8.5	8050	112	8820	112	48.27	12.32	19.5	ETRTO
12.00R24	20	160/156	K	8.5	8820	123	9915	123	48.27	12.32	19.5	ETRTO
11R22.5	16	148/145	K	8.25	6390	123	6945	123	41.50	10.98	17.6	ETRTO
295/80R22.5	18	154/149	K	9.00	7160	123	8270	123	41.10	11.73	18.9	ETRTO
315/80R22.5	20	156/150	K	9.00	7390	123	8820	123	42.36	12.28	19.5	ETRTO
385/65R22.5	20	160	K	11.75	---	---	9915	130	42.20	15.31	20.2	ETRTO
385/65R22.5	24	164	G	11.75	---	---	11000	130	42.20	15.31	20.2	ETRTO

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- HAT technology: low heat generation.

KMD403

RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
12.00R24	20	160/156	K	8.5	8820	123	9915	123	48.27	12.32	23.9	ETRTO
295/80R22.5	18	154/149	K	9.00	7160	123	8270	123	41.10	11.73	23.3	ETRTO
295/80R22.5	18	154/149	K	9.00	7160	123	8270	123	41.10	11.73	23 3	ETRTO
315/80R22.5	18	154/150	L	9.00	7390	120	8270	120	42.36	12.28	23.9	ETRTO
315/80R22.5	20	156/150	K	9.00	7390	123	8820	123	42.36	12.28	23.9	ETRTO

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- HAT technology: low heat generation.

LDO912

RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	16	148/145	J	8.25	6390	123	6945	123	41.34	10.98	25.2	ETRTO
275/80R22.5	16	149/146	J	8.25	6610	123	7160	123	39.84	10.87	25.2	ETRTO
295/80R22.5	16	152/148	F	9.00	6945	123	7830	123	41.10	11.73	25.2	ETRTO

- Good traction resistance.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.



COACH &URBAN

| LAU609 47



LAU609

RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
305/70R22.5	20	152/150 (154/150)	J(F)	9.00	7390	130	7830	130	39.37	12.01	26.5	ETRTO
275/70R22.5	16	148/145	J	8.25	6390	130	6945	130	37.72	10.87	26.5	ETRTO
275/70R22.5	16	148/145 (152/148)	J(E)	8.25	6390	130	6945	130	37.72	10.87	26.5	ETRTO
275/70R22.5	18	150/148 (152/148)	J(F)	8.25	6945	130	7390	130	37.72	10.87	26.5	ETRTO
11R22.5	16	148/145	J	8.25	6390	123	6945	123	41.34	10.98	26.5	ETRTO
245/70R19.5	12	129/127	J	7.50	4080	95	3860	95	33.03	9.76	20.2	TRA
245/70R19.5	14	133/131	J	7.50	4540	110	4300	110	33.03	9.76	20.2	TRA
245/70R19.5	14	133/131	J	7.50	4540	109	4300	109	33.03	9.76	20.2	ETRTO
245/70R19.5	16	135/133	J	7.50	4805	120	4540	120	33.03	9.76	20.2	TRA
245/70R19.5	16	136/134	J	7.50	4940	120	4675	120	33.03	9.76	20.2	ETRTO

- Enhanced sidewall ensures high safety.
- Tire strength is increased by 35%, with application of ST steel cord.
- Tire bead cracking is prevented, with application fiber layer in bead area.

LINGLONG TIRE



WINTER



LDW807 51
LDW808 51
LFW806 52
KWD700 52
KWD600 53
KWT600 53
KWD601 53



LDW807
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	16	146/143	M	8.25	6005	116	6610	116	41.50	10.98	25.2	JATMA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	25.2	TRA
11R22.5	16	148/145	L	8 25	6390	123	6945	123	41.50	10.98	25.2	ETRTO
315/70R22.5	16	154/150	L	9.00	7390	130	8270	130	39.92	12.28	25.2	ETRTO
295/80R22.5	16	152/148	K	9.00	6945	123	7830	123	41.10	11.73	25.2	ETRTO
295/80R22.5	16	150/147	K	9.00	6780	120	7390	120	41.10	11.73	25.2	GB
315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	25.2	ETRTO
315/80R22.5	20	156/150	L	9.00	7390	123	8820	123	42.36	12 28	252	ETRTO

- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.

LDW808
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
245/70R17.5	14	134/132	M	7.50	4400	112	4675	112	31.06	9.76	18.9	EIRTO
245/70R17.5	16	136/134	M	7.50	4675	123	4940	123	31.06	9.76	18.9	ETRTO
245/70R17.5	18	143/141	L	7.50	5675	127	6005	127	31.06	9.76	18.9	EIRTO
225/70R19.5	12	125/123	M	6.75	3415	95	3640	95	31.93	8.90	17.0	GB
225/70R19.5	14	128/126	M	6.75	3750	110	3970	110	31.93	8.90	17.0	GB
215/75R17.5	14	126/124	M	6.00	3525	102	3750	102	30.20	8.31	16.4	ETRTO
215/75R17.5	16	135/133	J	6.00	4540	123	4805	123	30.20	8.31	16.4	ETRTO
215/75R17.5	14	125/122	L	6.00	3305	110	3640	110	30.20	8.31	16.4	GB
215/75R17.5	16	127/124	J	6.00	3525	120	3860	120	30.20	8.31	16.4	GB
235/75R17.5	14	132/130	M	6.75	4190	112	4400	112	31.38	9.17	17.6	EIRTO
235/75R17.5	16	141/140	J	6.75	5510	123	5675	123	31.38	9.17	17.6	ETRTO
235/75R17.5	18	143/141	J	6.75	5675	127	6005	127	31.38	9.17	17.6	ETRTO
235/75R17.5	14	129/126	L	6.75	3750	110	4080	110	31.38	9.17	17.6	GB
235/75R17.5	16	132/129	J	6.75	4080	120	4400	120	31.38	9.17	17.6	GB

- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.

LFW806
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	16	146/143	M	8.25	6005	116	6610	116	41.50	10.98	18.9	JATMA
11R22.5	16	146/143	M	8.25	6005	120	6610	120	41.50	10.98	18.9	TRA
11R22.5	16	148/145	L	8.25	6390	123	6945	123	41.50	10.98	18.9	ETRTO
11R24.5	14	146/143	M	8.25	6005	105	6610	105	43.46	10.98	18.9	TRA
11R24.5	16	149/146	M	8.25	6610	120	7160	120	43.46	10.98	18.9	TRA
385/65R22.5	20	160(158)	J(L)	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO
275/70R22.5	16	148/145	M	8.25	6390	130	6945	130	37.72	10.87	18.9	ETRTO
275/70R22.5	16	144/141	M	8.25	5675	120	6175	120	37.72	10.87	18.9	GB
315/70R22.5	16	154/150	L	9.00	7390	130	8270	130	39.92	12 28	18.9	ETRTO
295/75R22.5	14	144/141	M	9.00	5675	110	6175	110	40.39	11.73	18.9	TRA
295/75R22.5	16	146/143	M	9.00	6005	120	6610	120	40.39	11.73	18.9	TRA
295/80R22.5	16	152/148	K	9.00	6945	123	7830	123	41.10	11.73	18.9	ETRTO
295/80R22.5	16	150/147	K	9.00	6780	120	7390	120	41.10	11.73	18.9	GB
315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	18.9	ETRTO
315/80R22.5	20	156/150 (154/150)	L/M	9.00	7390	123	8820	123	42.36	12 28	18.9	ETRTO

- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Low noise.

KWD700
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
11R22.5	16	146/143	L	8.25	6005	120	6610	120	41.93	10.98	27.1	TRA
11R24.5	16	149/146	L	8.25	6610	120	7160	120	43.94	10.98	27.1	TRA
295/75R22.5	16	146/143	L	9.00	6005	120	6610	120	40.24	11.53	26	TRA

- 3D Kerf technology provides excellent traction and long original tread life.
- Wide tread design and combined structure of rib and block pattern provid es stability, longer mileage, and better handling performance in all weather conditions.
- Long life, low rolling resistance.
- Optimizes the footprint for even wear and long tread life.
- Strong carcass materials help promote tire durability and provide tire retread-ability.

KWD600
RADIAL TRUCK TIRE



DRIVE

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
295/80R22.5	16	152/148	M	9.00	6945	123	7830	123	41.10	11.73	25.8	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	7390	130	8270	130	39.92	12.28	25.2	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	7390	130	8820	130	39.92	12.28	25.2	ETRTO
315/80R22.5	18	154/150	M	9.00	7390	120	8270	120	42.36	12.28	27.7	ETRTO
315/80R22.5	20	156/150 (154/150)	L/M	9.00	7390	123	8820	123	42.36	12.28	27.7	ETRTO

- Lasting grip and stability with M+S and 3PMSF marking.
- Optimized rib contact combats uneven wear and improves wet handling and braking.

KWT600
RADIAL TRUCK TIRE



TRAILER

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
385/55R22.5	18	158	L	12.25	---	---	9365	123	39.21	15.20	18.3	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	---	---	9915	130	39.21	15.20	18.3	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	---	---	9920	130	42.20	15.31	19.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	---	---	11000	130	42.20	15.31	19.5	ETRTO

- For trailer axle of trucks under snow condition use only.
- Lasting grip and stability with M+S and 3PMSF marking.
- Optimized rib contact combats uneven wear and improves wet handling and braking.

KWD601
RADIAL TRUCK TIRE



ALL POSITION

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max load and max air Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)	Operation Norm
245/70R19.5	12	129/127	M	7.50	4080	95	3860	95	33.03	9.76	18.3	TRA
245/70R19.5	14	133/131	M	7.50	4540	110	4300	110	33.03	9.76	18.3	TRA
245/70R19.5	14	133/131	M	7.50	4540	109	4300	109	33.03	9.76	18.3	ETRTO
245/70R19.5	16	135/133	M	7.50	4805	120	4540	120	33.03	9.76	18.3	TRA
245/70R19.5	16	136/134	M	7.50	4940	120	4675	120	33.03	9.76	18.3	ETRTO

- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.



SPECIAL TRAILER



LST71 57

LST72 58



LST71



LST72



TRAILER

LST71

RADIAL TRUCK TIRE

FEATURES & BENEFITS:



Closed shoulder promoted uniform wear and improved rolling resistance.



Stone rejector platforms in center groove for excellent durability.



Micro sipes on groove edges resistsabnormal or "river wear", enhances heat dissipation.



MADE IN THAILAND

TEST RESULTS

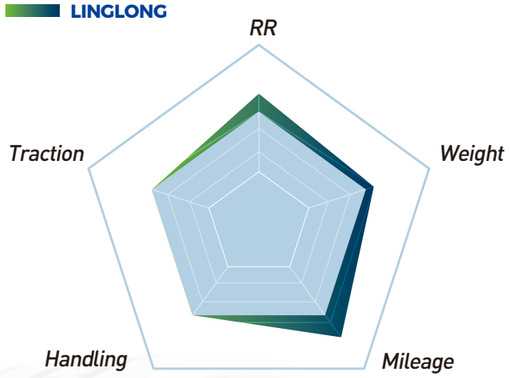

LST71 RADIAL TRUCK TIRE

TRAILER

Size	Load Index&Speed symbols	PR	Load Range	Max load and Max Air(lbs&psi) Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
ST205/75R15	115/110N	14	G	2335	95	2680	95	26.93	7.95	10
ST225/75R15	123/119L	14	G	3000	110	3420	110	27.95	8.78	10
ST225/75R15	121/117M	12	F	2835	95	3195	95	27.95	8.78	10
ST225/90R16	132/127M	14	G	3860	110	4400	110	31.34	8.66	10
ST235/80R16	129/125M	14	G	3640	110	4080	110	30.39	9.02	10
ST235/80R16	130/126M	16	H	3750	115	4190	115	30.39	9.02	10
ST235/85R16	132/127M	14	G	3860	110	4400	110	31.26	9.05	11
ST235/85R16	133/128M	16	H	3970	120	4540	120	31.26	9.05	11

TRAILER

LST72

RADIAL TRUCK TIRE

FEATURES & BENEFITS:



Closed shoulder promoted uniform wear and improved rolling resistance.



Stone rejector platforms in center groove for excellent durability.



Micro sipes on groove edges resistsabnormal or "river wear", enhances heat dissipation.



MADE IN THAILAND

TEST RESULTS

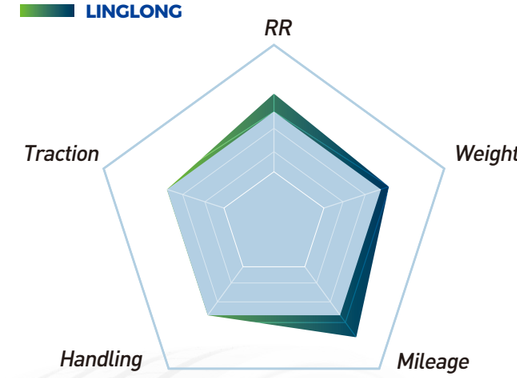

LST72 RADIAL TRUCK TIRE

TRAILER

Size	Load Index&Speed symbols	PR	Load Range	Max load and Max Air(lbs&psi) Dual lbs	Dual psi	Single lbs	Single psi	Overall Diameter in inches	Section Width in inches	Tread Depth (in 32nds)
ST205/75R15	115/110N	14	G	2335	95	2680	95	26.93	7.95	10
ST225/75R15	123/119L	14	G	3000	110	3420	110	27.95	8.78	10
ST225/75R15	121/117M	12	F	2835	95	3195	95	27.95	8.78	10
ST225/90R16	132/127M	14	G	3860	110	4400	110	31.34	8.66	10
ST235/80R16	129/125M	14	G	3640	110	4080	110	30.39	9.02	10
ST235/80R16	130/126M	16	H	3750	115	4190	115	30.39	9.02	10
ST235/85R16	132/127M	14	G	3860	110	4400	110	31.26	9.05	11
ST235/85R16	133/128M	16	H	3970	120	4540	120	31.26	9.05	11

Replacement Market Tires Warranty Manual

Warranty Eligibility

This limited warranty applies to all the qualified replacement market Truck and Bus Tires produced by Shandong Linglong Tyre Co., Ltd. and all its subsidiaries. This Limited Warranty only applies to the original purchaser, and the tire has a complete brand identification, DOT or barcode . and it is valid if all of the following apply:

- The tires are manufactured after January 1, 2025, and are shipped to North America for sale and use.
- The tire fails due to the workmanship or materials.
- The tire shall not exceed the warranty period, and the remaining pattern shall not be less than TWI.

What Is Warranted and for How Long

- The warranty period is 6 years from the date of tire production， and the remaining pattern depth is not less than TWI .
- If the tire fails due to manufacturing reasons and meets the warranty scope and conditions, the remaining pattern exceeds TWI, the new tire of the same specification will be covered free of charge.

What Is Not Warranted

1. Road hazard injuries or damages caused by obstacles or debris, such as cuts, punctures (whether repairable or not), snags, bruises, tears, abrasions or impact breaks.

2. Improper repairs or repairs that have failed.

3. Improper inflation or other maintenance abuses.

4. Improper mounting/dismounting.

5. Mechanical irregularities such as bent wheel assemblies, misalignment worn or faulty components.

6. Accident, corrosion, tire alteration, vandalism, fire, theft or damages cause by nature.

7. Damage from overinflation or under-inflation, overloading, defective vehicle mechanical conditions.

8. Non-racing or off-road tires that are misused or abused for racing or off-road purposes.

9. Ozone or weather cracking or other abuse, misuse, tire alteration, run flat.

10. Tire which D.O.T identification number and/or brand name removed intentionally.

11. Tires that have been modified after leaving the factory , such as fillers, sealants, balancing substances and external tire treatments or materials of any kind. If the added material is the cause of a failure, a tire will not be accepted for warranty claim.

12. Abnormal tread wear resulting from improper installation, wheel misalignment, tire/wheel assembly imbalance, etc.

13. Vehicles or tires operated in excess of the rated Work Capacity Factor.

14. Additional monetary loss, such as damage of the vehicle or time, etc.

Casing Warranty

We offers retreading guarantees for Truck and Bus Tires. if the tires cannot be retreaded due to the manufacturer's own reasons, a subsidy will be provided. This renovation rule applies only to the United States and Canada.

The LINGLONG brand offers a 6-year warranty with 2 retreads; Some specified patterns offer a 7-year warranty with 3 retreads; Some specified patterns offer a 8-year warranty with 4 retreads; The specific details of the specified patterns are as follows.

Mileage Warranty Product List:

Brand	Warranty	Specified tire patterns
LINGLONG	Warranty period for retreading is 6 years, and can be retreaded 2 times.	
	Some specified patterns offer a 7-year warranty with 3 retreads.	LLD71
		LLD73
		LLT71
		LRA71
		LRD71
		LRT71
		LRA72s
	Some specified patterns offer a 8-year warranty with 4 retreads.	LLS71 PRO
		LLD72 PRO

To Make a Claim Under This Limited Warranty

- At the time of purchase, tires must be properly installed with recommended inflation and balanced. Observe rotation and alignment regularly according to recommendations.
- Refer to any authorized the Company's dealer or point of purchase for adjustment claim.
- Owner is responsible for service charges and applicable taxes.
- Submit a copy of the original purchase receipt to support the adjustment claim.

Dealer's Obligation and Claim Process

- The company's authorized dealer or customer (buyer) submit adjustment claim along with a cut-out slice of full DOT serial from the disabled tire, measurements of tread remaining, photos showing tread area as well as damage area, etc. to LINGLONG TIRE to validate and process the adjustment claim.
- Any other information such as VIN(Vehicle Identification Number) or relevant information / material must be submitted if required.

Tire Safety and Maintenance

Tire failure can result in serious damage and/or personal injury. To reduce these risks we recommend the following :

1、Maintain proper inflation, do not under or over inflate. Always maintain inflation according to the vehicle manufacturer's or the Company's recommendations.

2、Wheel alignment and balancing should be checked at regular intervals.

3、Do not overload, refer to load carrying capacity information molded on tire sidewall.

4、Avoid spinning, driving over curbs, potholes, obstacles and edges of pavement.

5、Never drive with smooth(bald) tires. By law, tires must be replaced when worn to TWI (tread wear indicator).

6、Check your tires frequently for any damage such as scrapes, cuts, foreign objects, separations or bulges. If damaged replace it with spare and refer to an authorized dealer.

7、Do not drive in excess of permitted speed limits and beyond the maximum specified by tire.

8、To achieve proper wear and optimize tread life, rotate your tires at least every 6000 miles.

Exclusions, Limitations, and Legal Rights

No representative or dealer is authorized to make any representation, promise, or agreement on behalf of Linglong, except as expressly stated in this document. Any tire, regardless of construction quality, may fail in service or otherwise become unserviceable due to conditions beyond the manufacturer's control. This warranty does not constitute a representation that tire failure will not occur under any circumstances.

DISCLAIMER: This warranty is provided in lieu of all other warranties and representations, express or implied. Linglong expressly disclaims any and all implied warranties, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. No other warranty or representation of any kind shall be deemed to exist or arise by operation of law.

LIMITATION OF DAMAGES: Under no circumstances shall Linglong be liable for any indirect, special, incidental, consequential, or punitive damages, including but not limited to loss of profits, business interruption, loss of reputation or goodwill, or costs related to replacement transportation or other associated expenses. Certain states or provinces do not allow the exclusion or limitation of incidental or consequential damages; therefore, some portions of this limitation may not be enforceable in specific jurisdictions.

This warranty sets forth specific legal obligations, and additional rights may apply depending on the governing state or provincial law.